


Firebox X Edge Firewalls

Using HTTP(S)

We would recommend using HTTPS rather than HTTP for transferring your devices configuration as the latter provides no encryption. The procedure for getting the configuration from the device using HTTP(S) is as follows:

1. Using your favorite web browser, connect to the HTTP(S) service provided by your Firebox X Edge for remote management. You can do this by entering "https://" (recommended) or "http://" followed by your devices IP address.
2. Logon using your administration username and password.

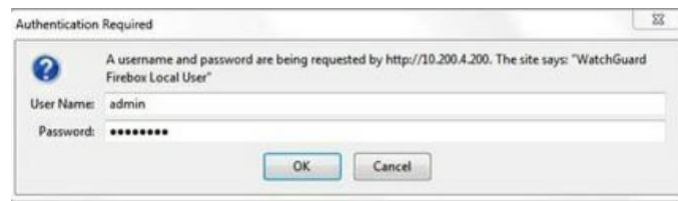

3. Click Administration followed by View Configuration



Component	Version	Feature	Status	
Firewall	7.5	WatchGuard Logging	Disabled	Configure
	Oct 6 2005	WSM Access	Enabled	Configure
	build 18	Syslog	Enabled	Configure
Boot ROM	7.2.1			
Model	X15			
Serial Number	7067019DE674F	Option	Status	

4. The copy and paste the displayed configuration in a .txt file and save.



```

Administration
View Configuration File

FDATE: Oct 6 2005
FTIME: 13:53:50
FWER: 7.5
admin.external_access: 1
admin.idle_timeout: 0
admin.ipsec_access: 1
admin.max_access: 0
admin.natn_access: 0
admin.trusted_access: 1
auth.idap.group_attr: isMemberOf
auth.idap.login_attr: uid
auth.idap.port: 389
auth.idap.timeout: 10
auth.idap.type: 3
config.version: 0.1
config.watchguard.dvcp.default_lease_interval: 10
config.watchguard.dvcp.enable: 1
config.watchguard.dvcp.server.00.ip: 192.168.0.20
config.watchguard.id: 192.168.0.25
groups.default.admin_level: 0
groups.default.external_access: 1
groups.default.idle_timeout: 0
groups.default.ipsec_access: 0
groups.default.max_access: 0
groups.default.natn_access: 0
groups.default.name: Default
groups.default.trusted_access: 1
guest.enable: 0
guest.external_access: 1
  
```