


3COM SuperStack 3 Firewalls

We would recommend using HTTPS rather than HTTP for transferring your devices configuration as the latter provides no encryption. The procedure for getting the configuration from the device using HTTP(S) is as follows:

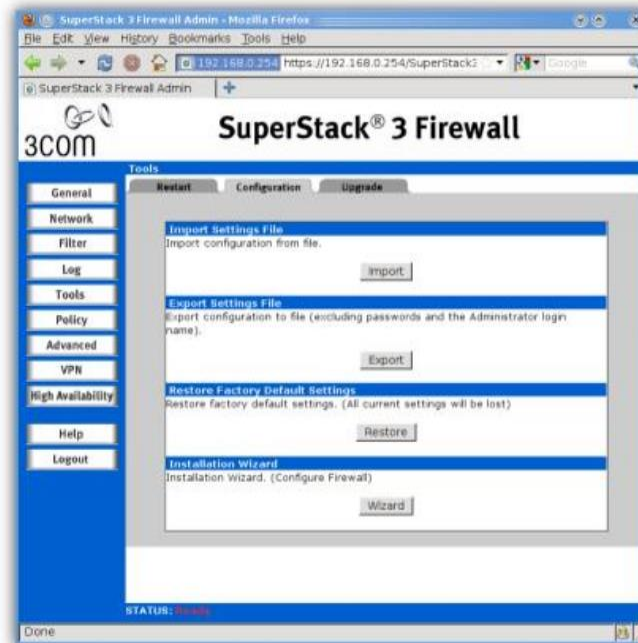

Using your favorite web browser, connect to the HTTP(S) service provided by your 3Com SuperStack 3 firewall for remote management.

You can do this by entering "https://" (recommended) or "http://" followed by your devices IP address. Logon using your administration username and password.

3Com SuperStack 3 firewalls default to using "admin" for the username and "password" for the password.

Select from the menu on the right; "Tools".

Select the "Configuration" tab at the top.

Click the "Export" button and follow the instructions to save the device configuration to a file.