

# Palo Alto PA-200


## Using HTTP(S)

We would recommend using HTTPS rather than HTTP for transferring your devices configuration as the latter provides no encryption. The procedure for getting the configuration from the device using HTTP(S) is as follows:


1. Using your favorite web browser, connect to the HTTP(S) service provided by your Palo Alto device for remote management. You can do this by entering "https://" (recommended) or "http://" followed by your devices IP address.
2. Logon using your administration username and password.



3. Click the **Device** tab and then the **Operations** tab.

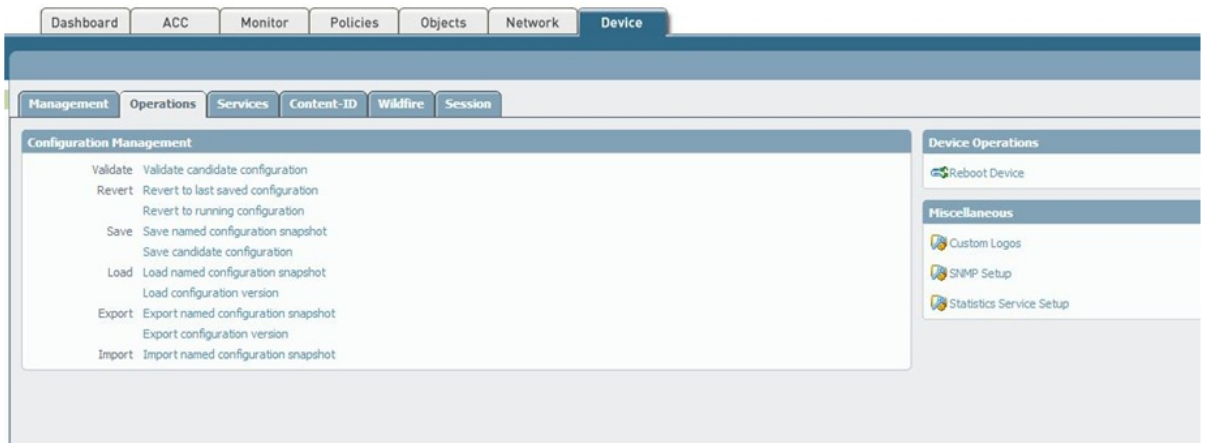

4. Click **Export named configuration snapshot** and then choose the configuration that you would like to export.

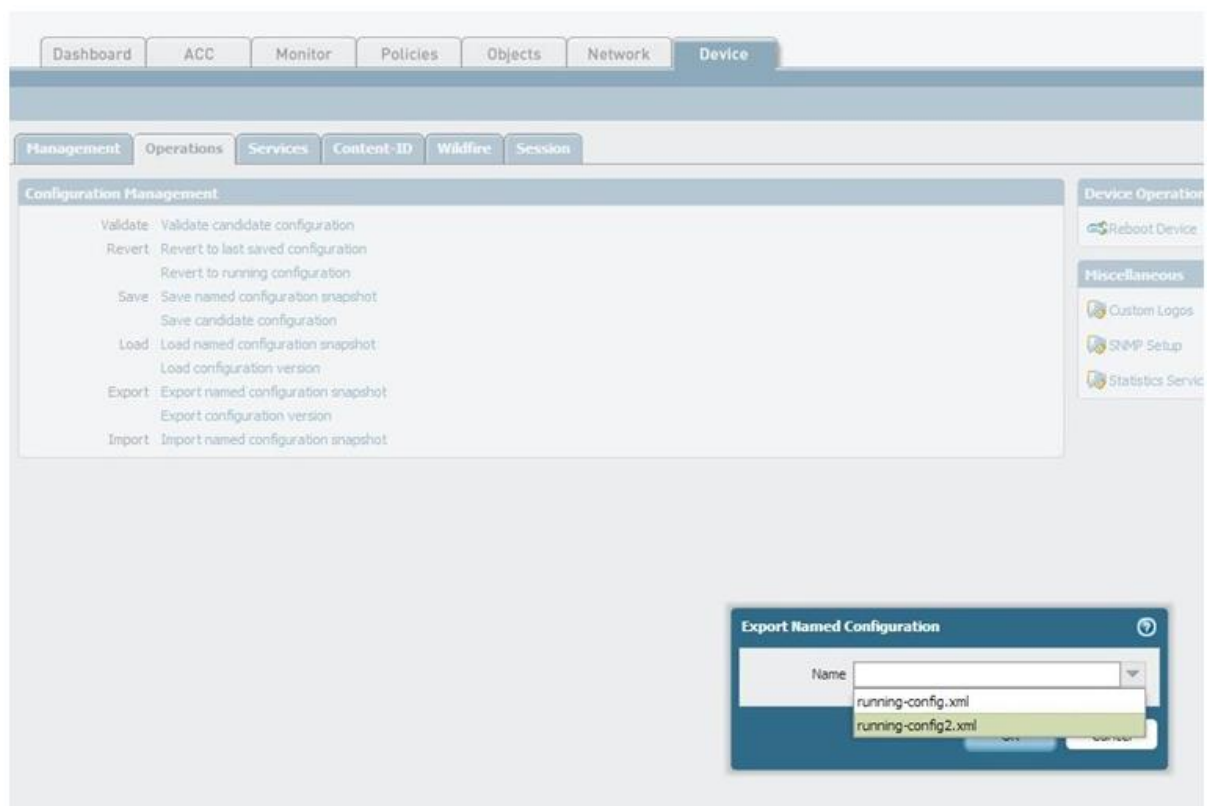

5. Finally click **Ok** to save your device configuration.

**Note:** Unfortunately, the full version (patch number - 8.0.5) is not available in Palo Alto configuration files. To workaroud this, when adding a Palo Alto device, click the **Edit** pencil and manually set the OS version to the correct version. This version number can be found under **Software Version** in your Palo Alto **General Information** window.